

## **DIESEL OIL FILTERS AND FUEL OIL FILTERS WITH HEATING ELEMENT**



■ **EASY MAINTENANCE**

■ **REUSABLE FILTER CARTRIDGES**

■ **ALL FILTERS ARE TEST FOR TIGHTNESS**

Many years of experience in the field have gone into design and construction of our latest generation of top-quality Diesel oil filters.

The wide range of models in the line makes it possible to satisfy all applications and customer requirements.

### **1. MAINTENANCE**

Ease of maintenance is distinguishing feature of all FAG filters.

For correct and proper servicing, proceed as follows:

- A. Shut off fuel in the length of piping being serviced.
- B. Unscrew the tray (clockwise).
- C. Remove the filter cartridge and wash it with petrol or replace where applicable. Check seal O-rings and replace if necessary.
- D. Reassemble the tray and restore fuel flow.

### **2. MATERIALS**

Cover: aluminum alloy EN AB 46100


Bowl: aluminum alloy EN AB 46100

100 em - 200 em filter cartridge, 304 stainless steel web

300 em filter cartridge with galvanized iron web

O - ring: NBR 70 - DIN EN 549

Connections: Gas threads in accordance with UNI - ISO 7/1

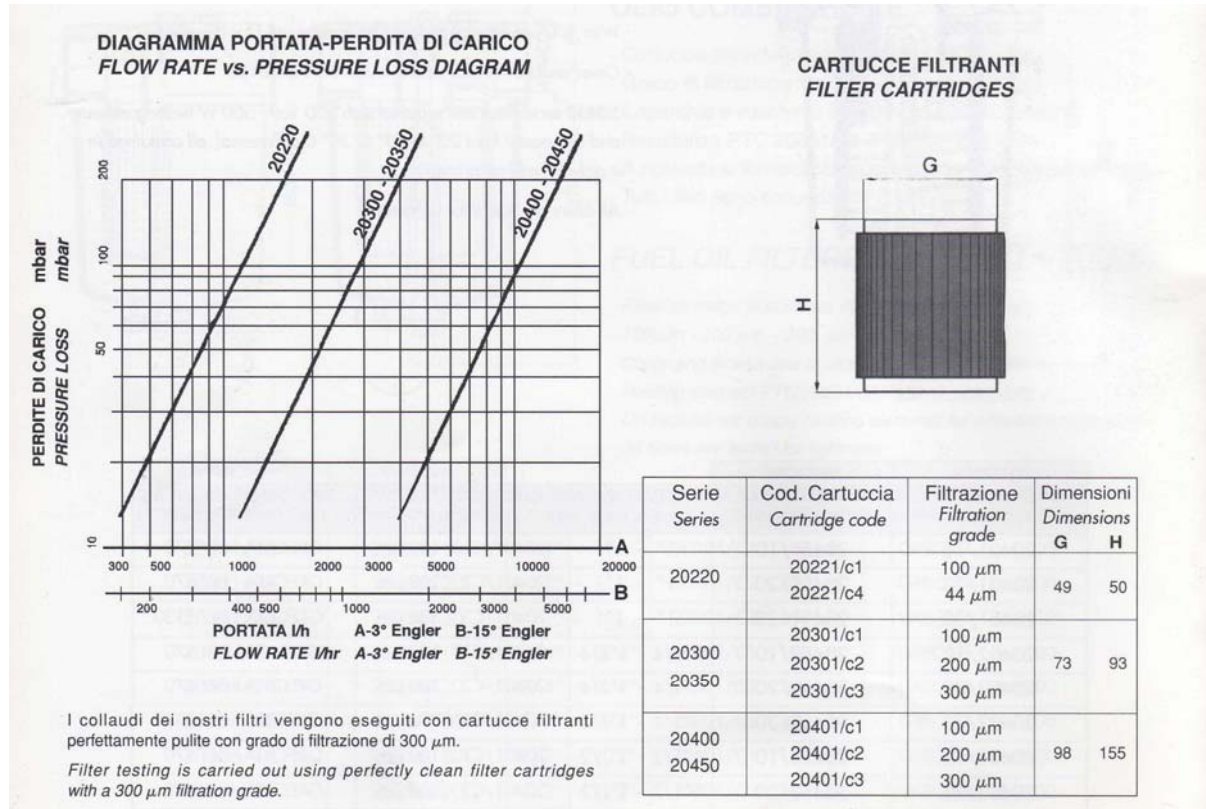

Filter testing is carried out using perfectly clean filter cartridges with a 300  $\mu\text{m}$  filtration grade.